


## PRODUCT DATASHEET

# ECOPACK<sup>®3</sup> CLASSIC

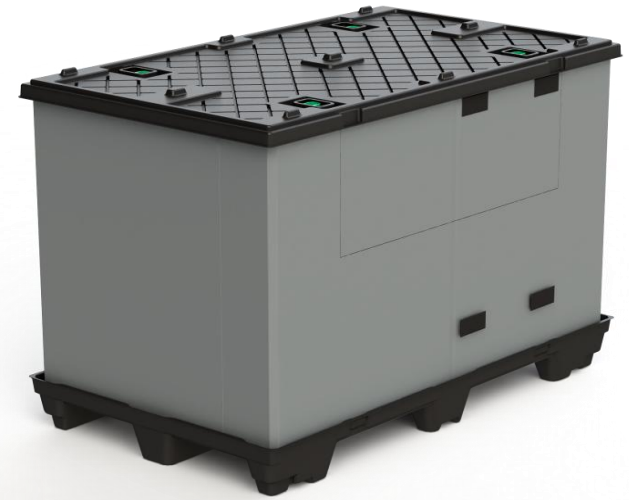

Version 11.03.2016-01

	EC1208						EC1210						EC1308						EC1512						EC1612					
Outside dimensions	L	W	H	Return* Rate	F	QTY* E	L	W	H	Return* Rate	F	QTY* E	L	W	H	Return* Rate	F	QTY* E	L	W	H	Return* Rate	F	QTY* E	L	W	H	Return* Rate	F	QTY* E
S	1200	800	750	1:4,3	132	572	1200	1000	750	1:4,5	104	468	1350	820	750	1:4,3	120	525	1500	1200	750	1:4,4	72	315	1600	1200	750	1:4,1	64	264
L	1200	800	995	1:5,3	99	528	1200	1000	990	1:5,6	78	442	1350	820	990	1:5,0	90	450	1500	1200	990	1:6,0	54	324	1600	1200	990	1:5,7	48	272
XL	1200	800	1450	1:6,9	66	460	1200	1000	1450	1:8,4	52	440	1350	820	1450	1:7,0	60	420	1500	1200	1450	1:7,0	36	252	1600	1200	1450	1:7,0	32	224
Inside dimensions	L	W	H			L	W	H			L	W	H			L	W	H			L	W	H			L	W	H		
S	1140	735	530			1130	930	525			1285	755	540			1430	1130	555			1540	1135	545			1540	1135	545		
L	1140	735	775			1130	930	765			1285	755	780			1430	1130	795			1540	1135	785			1540	1135	785		
XL	1140	735	1230			1130	930	1225			1285	755	1240			1430	1130	1255			1540	1135	1245			1540	1135	1245		

\*Based on Mega Trailer (13600 x 2460 x 2960)

All other dimensions on request



	Outside dimensions	Compression test *	VMT advice to customer		Safety Factor **
		Measured (kg)	Gross weight (kg)	Upload (kg)	
EC1208	Light	1399	200	600	2,3
	Medium	2610	350	1050	2,5
	heavy Duty	4505	500	1500	3,0
EC1210	Light	1548	200	600	2,6
	Medium	2544	350	1050	2,4
	heavy Duty	3754	500	1500	2,5
EC1308	Light	1659	200	600	2,8
	Medium	2520	350	1050	2,4
	heavy Duty	4822	500	1500	3,2
EC1512	Light	1349	200	600	2,2
	Medium	2550	350	1050	2,4
	heavy Duty	3752	500	1500	2,5
EC1612	Light	1264	200	600	2,1
	Medium	2390	350	1050	2,3
	heavy Duty	3039	500	1500	2,0